


K2-0.38Ⅱ Series for 0.8mm [31mil] Pitch


K2 0.38 Series Plunger Tip Styles

Pin Length: 12.0mm [0.472inch.]


Unit: mm [inch]




K2-0.38 III A-2M-8




K2-0.38 III AH-2M-7




K2-0.38 III F-2M-3




K2-0.38 III H-2M-5



K2-0.38 III Q-2M-13



抜け止め用曲げ加工付
Bending for retention

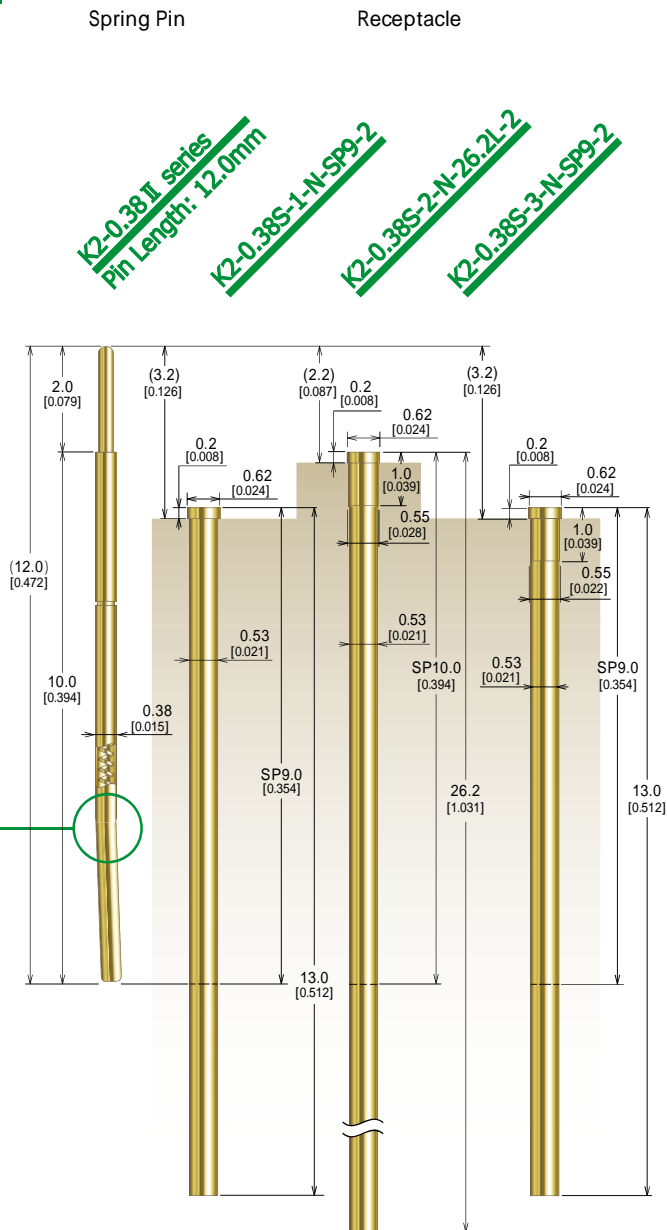

K2-0.38Ⅱ series
Pin Length: 12.0mm
K2-0.38S-1-N-SP9-2
K2-0.38S-2-N-26.2L-2
K2-0.38S-3-N-SP9-2

スプリングピン仕様 Spring Pin Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	33gf [1.16oz.]
初期荷重 Initial Force	18gf [0.63oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	100万回 (1000K Cycles)
抵抗値 Resistance (Typ.)	100m
最大許容電流値 Current Rating (Typ.)	2.1A
使用温度 Operating Temp.	45 125
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Phosphor Bronze / Au
Spring	Music Wire / Au

リセプタクル品名 Receptacle

K2 0.38S 1 N SP9 2
(末端加工無し / No Termination)



K2 0.38S 2 N 26.2L 2
(末端加工無し / No Termination)



K2 0.38S 3 N SP9 2
(末端加工無し / No Termination)



リセプタクル仕様 Receptacle Specifications


Material/Finish	Brass / Au
-----------------	------------

*All specifications are subject to change without notice.


K2-0.38II Series for 0.8mm [31mil] Pitch

K2 0.38 Series Plunger Tip Styles


Pin Length: 14.5mm [0.571inch.]




K2-0.38 III CA-4.5M0.4-7




K2-0.38 III CH-4.5M0.4-12




K2-0.38 III G-4.5M0.4-9



K2-0.38 III LC-4.5M0.4-5



K2-0.38 III U-4.5M0.4-5



抜け止め用曲げ加工付
Bending for retention

Spring Pin

Receptacle


Unit: mm [inch]

K2-0.38II series
Pin Length: 14.5mm

K2-0.38S-1-N-SP9-2

K2-0.38S-2-N-26.2L-2

K2-0.38S-3-N-SP9-2

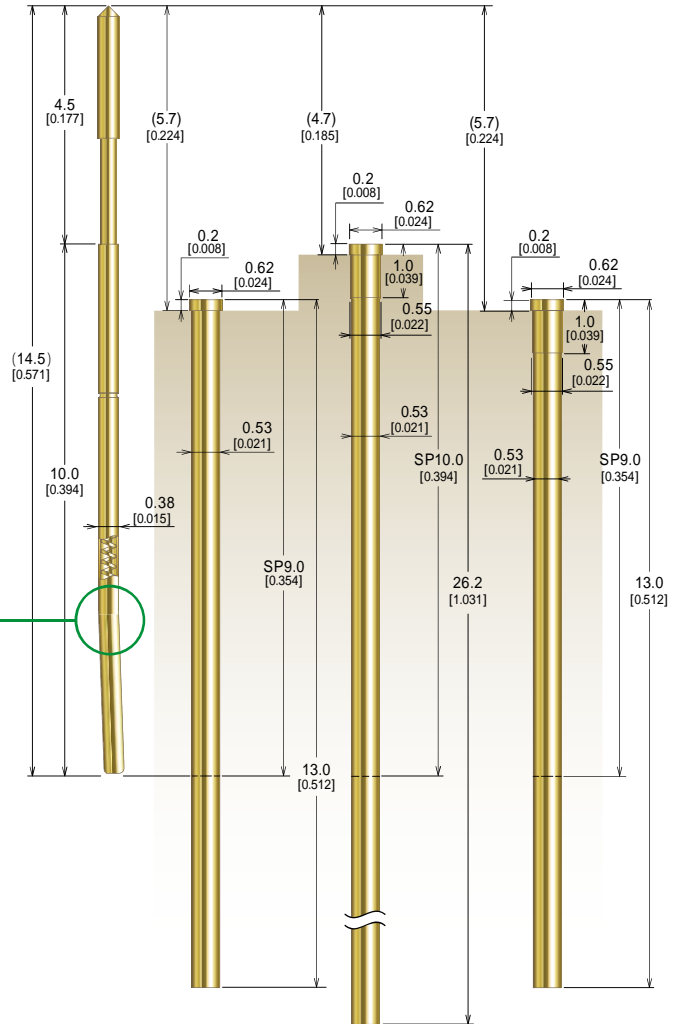

スプリングピン仕様 Spring Pin Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	33gf [1.16oz.]
初期荷重 Initial Force	18gf [0.63oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	100万回 (1,000K Cycles)
抵抗値 Resistance (Typ.)	100m
最大許容電流値 Current Rating (Typ.)	2.8A
使用温度 Operating Temp.	45 125
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Phosphor Bronze / Au
Spring	Music Wire / Au

リセプタクル 品名 Receptacle

K2 0.38S 1 N SP9 2
(末端加工無し / No Termination)

K2 0.38S 2 N 26.2L 2
(末端加工無し / No Termination)

K2 0.38S 3 N SP9 2
(末端加工無し / No Termination)

リセプタクル仕様 Receptacle Specifications

Material/Finish

Brass / Au

*All specifications are subject to change without notice.