


K2-0.48II Series for 1.0mm [39mil] Pitch


K2 0.48 Series Plunger Tip Styles

Unit: mm [inch]


Pin Length: 17.0mm [0.669inch.]




K2-0.48 II A-2M-2



K2-0.48 II AH-2M-3



K2-0.48 II F-2M-2



K2-0.48 II Q-2M-3

Spring Pin


Receptacle

K2-0.48 II series
Pin Length: 17.0mm

K2-0.48S-2-SP14-2

K2-0.48S-3-2

K2-0.48S-4-26.2L-2

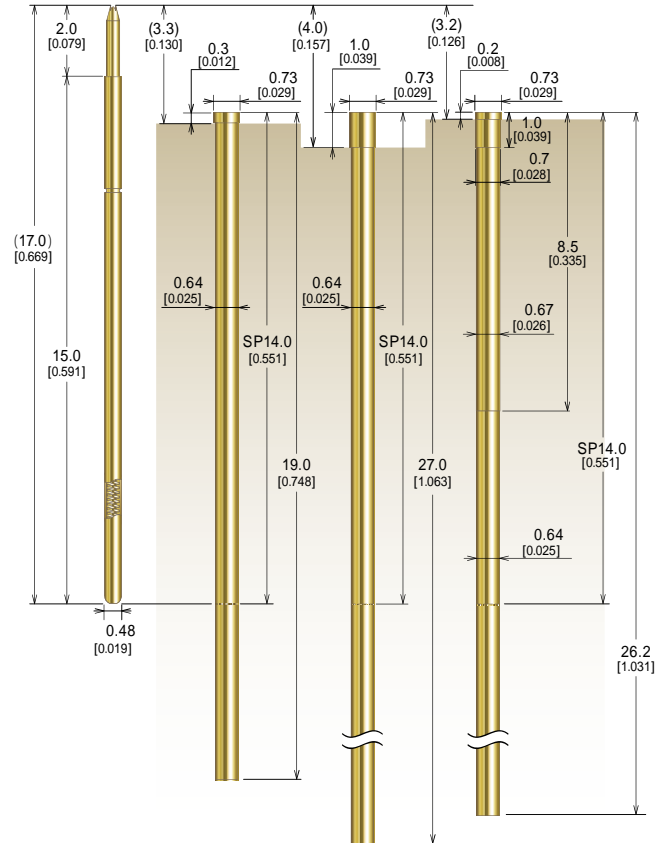

リセプタクル 品名 Receptacle

K2 0.48S 2 SP14 2
(末端加工無し / No Termination)



K2 0.48S 3 2
(末端加工無し / No Termination)



K2 0.48S 4 26.2L 2
(末端加工無し / No Termination)



スプリングピン仕様 Spring Pin Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	50gf [1.76oz.]
初期荷重 Initial Force	26gf [0.92oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	100万回 (1,000K Cycles)
抵抗値 Resistance (Typ.)	100m
最大許容電流値 Current Rating (Typ.)	5.1A
使用温度 Operating Temp.	45 125
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Phosphor Bronze / Au
Spring	Music Wire / Au

リセプタクル仕様 Receptacle Specifications


Material/Finish	Brass / Au
-----------------	------------

*All specifications are subject to change without notice.


K2-0.48II Series for 1.0mm [39mil] Pitch

K2 0.48 Series Plunger Tip Styles


Pin Length: 19.0mm [0.748inch.]




K2-0.48 III A-4M-5




K2-0.48 III AH-4M-4




K2-0.48 III CA-4M0.5-5




K2-0.48 III CH-4M0.6-5




K2-0.48 III F-4M-3




K2-0.48 III G-4M0.5-2




K2-0.48 III H-4M-3




K2-0.48 III I-4M0.5-3



K2-0.48 III LC-4M0.5-4



K2-0.48 III Q-4M-5



K2-0.48 III U-4M0.5-2


※ 最大ストローク Max Travel: 2.3mm [0.091 inch]

スプリングピン仕様 Spring Pin Specifications

推奨ストローク Operating Travel	1.33mm [0.052 inch]
荷重 Spring Force at Operating Travel	50gf [1.76oz.]
初期荷重 Initial Force	26gf [0.92oz.]
最大ストローク Max Travel	2.0mm [0.079 inch]
スプリング耐久回数 Life Span at Operating Travel	100万回 (1,000K Cycles)
抵抗値 Resistance (Typ.)	100m
最大許容電流値 Current Rating (Typ.)	4.2A
使用温度 Operating Temp.	45 125
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Phosphor Bronze / Au
Spring	Music Wire / Au

Spring Pin

Unit: mm [inch]
Receptacle

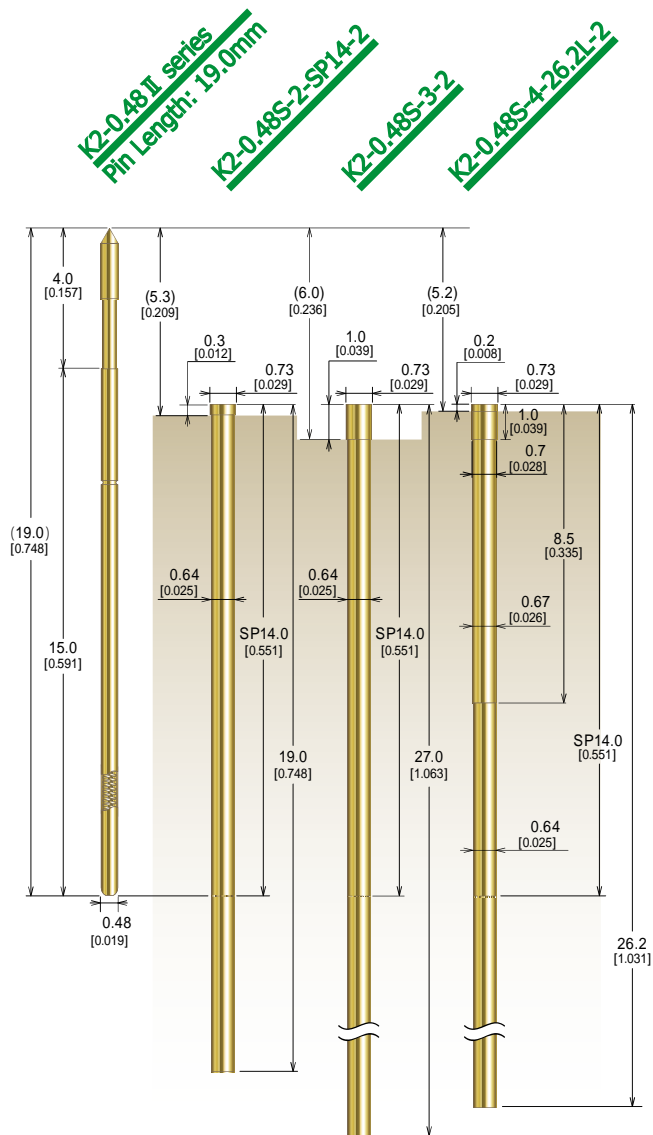

リセプタクル 品名 Receptacle

K2 0.48S 2 SP14 2
(末端加工無し / No Termination)



K2 0.48S 3 2
(末端加工無し / No Termination)



K2 0.48S 4 26.2L 2
(末端加工無し / No Termination)



リセプタクル仕様 Receptacle Specifications

Material/Finish Brass / Au