


K2-0.68Ⅲ Series for 1.27mm [50mil] Pitch


K2 0.68 Series Plunger Tip Styles

Pin Length: 24.6mm [0.969inch.]


Unit: mm [inch]




K2-0.68Ⅲ A-6.3M-3




K2-0.68Ⅲ CA-6.3M1.2-3




K2-0.68Ⅲ F-6.3M-4




K2-0.68Ⅲ G-6.3M1.2-3




K2-0.68Ⅲ H-6.3M-3




K2-0.68Ⅲ K-6.3M1.2-3



K2-0.68Ⅲ L-6.3M1.2-3




K2-0.68Ⅲ Q-6.3M-4



K2-0.68Ⅲ U-6.3M1.2-3

Spring Pin

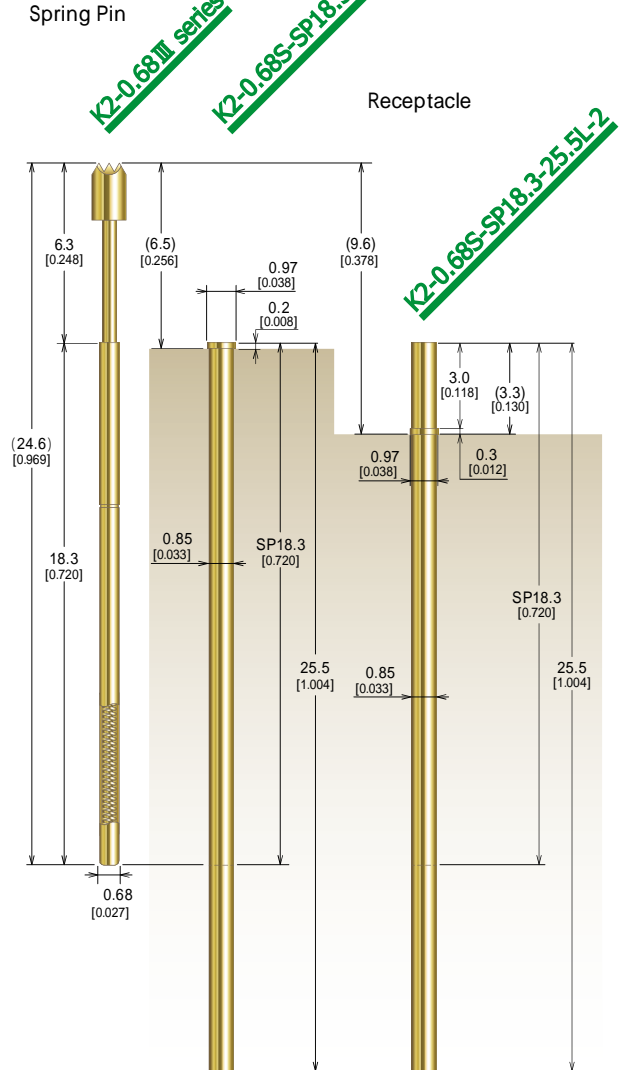

スプリングピン仕様 Spring Pin Specifications

推奨ストローク Operating Travel	2.87mm [0.113 inch]
荷重 Spring Force at Operating Travel	80gf [2.82oz.]
初期荷重 Initial Force	27gf [0.95oz.]
最大ストローク Max Travel	4.3mm [0.169 inch]
スプリング耐久回数 Life Span at Operating Travel	10万回 (100K Cycles)
抵抗値 Resistance (Typ.)	60m
最大許容電流値 Current Rating (Typ.)	5.1A
使用温度 Operating Temp.	45 125
Material/Finish	
Plunger	SK (Steel) / Au
Barrel	Phosphor Bronze/ Au
Spring	Music Wire / Au

リセプタクル品名 Receptacle

K2 0.68S SP18.3 25.5L 1
(末端加工無し / No Termination)

K2 0.68S SP18.3 25.5L 2
(末端加工無し / No Termination)

リセプタクル仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------

*All specifications are subject to change without notice.