


# K2-0.72II Series for 1.27mm [50mil] Pitch


## K2 0.72 Series Plunger Tip Styles

Unit: mm [inch]


Pin Length: 22.8mm [0.898inch.]




**K2-0.72 II A-4.5M-4**  
Plunger Material: SK (Steel)




**K2-0.72 II AH-4.5M-4**  
Plunger Material: SK (Steel)




**K2-0.72 II C-4.5M1.0-1**  
Plunger Material: SK (Steel)




**K2-0.72 II CH-4.5M1.0-4**  
Plunger Material: SK (Steel)




**K2-0.72 II CR-4.5M1.0-3**  
Plunger Material: SK (Steel)




**K2-0.72 II F-4.5M-5**  
Plunger Material: SK (Steel)




**K2-0.72 II G-4.5M1.0-2**  
Plunger Material: SK (Steel)



**K2-0.72 II H-4.5M-4**  
Plunger Material: SK (Steel)




**K2-0.72 II LC-4.5M1.0-1**  
Plunger Material: BeCu



**K2-0.72 II U-4.5M1.0-4**  
Plunger Material: SK (Steel)

## スプリングピン仕様 Spring Pin Specifications

推奨ストローク Operating Travel	2.0mm [0.079 inch]
荷重 Spring Force at Operating Travel	80gf [2.82oz.]
初期荷重 Initial Force	33gf [1.16oz.]
最大ストローク Max Travel	3.0mm [0.118 inch]
スプリング耐久回数 Life Span at Operating Travel	100万回 ( 1,000K Cycles)
抵抗値 Resistance (Typ.)	50m
最大許容電流値 Current Rating (Typ.)	4.4A
使用温度 Operating Temp.	45 125
Material/Finish	
Plunger	SK (Steel) or BeCu / Au
Barrel	Phosphor Bronze / Au
Spring	Music Wire / Au

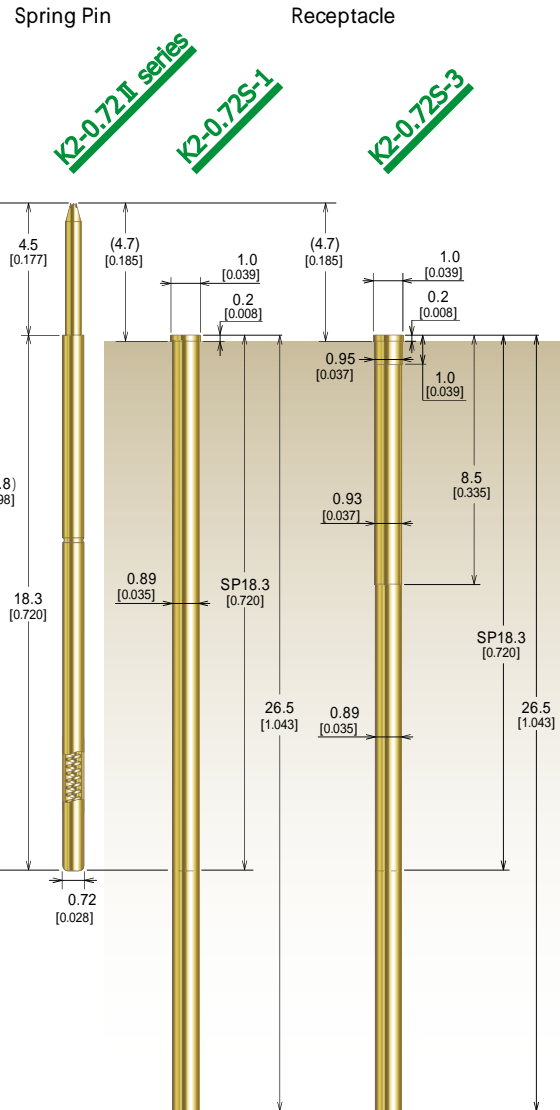

## リセプタクル 品名 Receptacle

**K2 0.72S 1**  
(末端加工無し / No Termination)



**K2 0.72S 1 U**  
(ソルダーカップ付 / with Solder Cup)



**K2 0.72S 3**  
(末端加工無し / No Termination)



**K2 0.72S 3 1 U**  
(ソルダーカップ付 / with Solder Cup)



## リセプタクル仕様 Receptacle Specifications

Material/Finish	Brass / Au
-----------------	------------

\*All specifications are subject to change without notice.