


# K2-2.03 Series for 3.0mm [118mil] Pitch


## K2 2.03 Series Plunger Tip Styles

Unit: mm [inch]


Pin Length: 33.0mm [1.299inch.]




K2-2.03A-8.3M-4




K2-2.03C-8.3M1.575-4




K2-2.03G-8.3M2.54-6




K2-2.03K-8.3M2.54-7



K2-2.03LC-8.3M1.575-4



K2-2.03U-8.3M1.575-4

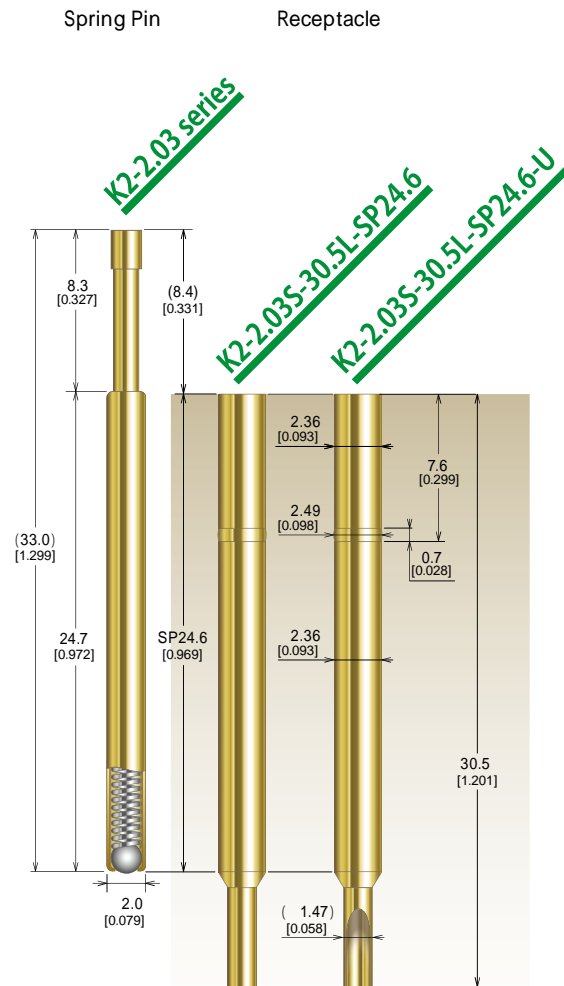

## スプリングピン仕様 Spring Pin Specifications

推奨ストローク Operating Travel	4.2mm [0.165inch]
荷重 Spring Force at Operating Travel	200gf [7.05oz.]
初期荷重 Initial Force	77gf [2.72oz.]
最大ストローク Max Travel	6.3mm [0.248 inch]
スプリング耐久回数 Life Span at Operating Travel	100万回 ( 1,000K Cycles)
抵抗値 Resistance (Typ.)	35m
最大許容電流値 Current Rating (Typ.)	5.9A
使用温度 Operating Temp.	45 140

Material/Finish

Plunger	BeCu / Au
Barrel	Brass / Au
Spring	Stainless Steel /
Ball	Stainless Steel /

## リセプタクル 品名 Receptacle

K2-2.03S-30.5L-SP24.6  
(末端加工無し / No Termination)

K2-2.03S-30.5L-SP24.6-U  
(ソルダーカップ付 / with Solder Cup)

## リセプタクル仕様 Receptacle Specifications

Material/Finish Nickel Silver / Au

\*All specifications are subject to change without notice.